

# LED FLEX STRIP - EvenBright™

Model: FA266M20-5M-24V-X (X = COLOR W:Pure White / WW:Warm White / NW:Neutral White)



## MODEL

**FA266M20-5M-24V-X**

- COLOR (W, WW, NW)
- VOLTAGE (24V)
- LENGTH (5 Meters)
- LED TYPE (2016 SMD)
- LED/METER (266LED/Meter)
- COVER TYPE (Type A, no coating)
- A=IP22 B=IP62 C=IP64
- FLEX STRIP

**24V**  
DC Power

**4.6**  
WATTS  
FOOT

**90>**  
CRI

flexible

**VIEW ANGLE**  
120°

**25,000+**  
HOURS

**DIMMABLE**

**TRIMMABLE**



use only with  
Class 2 Type  
power units



## BENEFITS




- Dimmable Via optional dimming solutions
- View Angle 140°
- Double sided 3M Tape backing, 2Oz UL recognized PCBs
- Ultra bright surface - mount LEDs
- CRI 90 or better
- Epistar super bright LEDs, perfect color consistency
- No RF interference
- Long life of LEDs, LM-80 tested LEDs, 6000H testing at 55°C
- Flexible LED strip lights
- Even lighting, Continuous length
- Can be cut to size at marked intervals (about an inch)
- Available in Warm White (3000K), Pure White (5200K) and Neutral White (4200K)

## APPLICATIONS

- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms, jewelry showrooms and exhibition displays
- Optional aluminum mounting channel with clear and diffused lens



## DIAGRAM

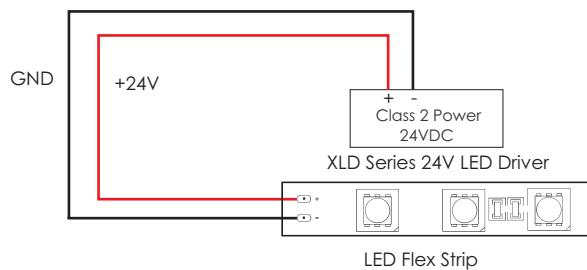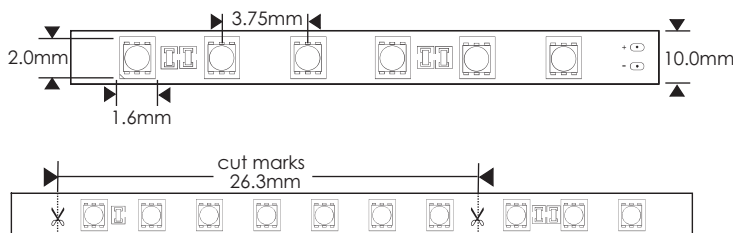

SPECIFICATIONS	
Roll Size	5 Meters (16.4 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt Foot	4.6
Light Source	266 pcs/Meter (39.37") 2016 SMD LED
Dimensions	5000(L) x 10(W) x 1.0(H)mm (16.4' x 3/8" x 3/100")
Max Length	5 Meters (16.4 Feet)
View Angle	120°
Brightness	420~450 LM/ft (30.5cm)
Bend Radius	4 inches (100mm) Max, one flat plane
Lamp Life	>30,000 hours (average life)
IP Rating	IP22 Type A
Mount	Smooth Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ 104°F)

OPTIONAL ACCESSORIES		
<b>XLD200B-224V-FC (24VDC)</b> One Channel Output-Class 2	<b>E96L24DC-KO</b> (24VDC) Dimmable Class 2	<b>Wago Block Connectors</b> (#222-413)

