

LED FLEX STRIP - Triple Bright

Model: FA60M50-5M-24V-X (X = COLOR W:Pure White / WW:Warm White)



MODEL

FA60M50-5M-24V-X

- COLOR (W=Pure White, WW=Warm White)
- VOLTAGE (24V)
- LENGTH (5 Meters)
- LED TYPE(5050 SMD)
- LED/METER (60LED/Meter)
- COVER TYPE (Type A, no coating)
- A=IP22 B=IP62 C=IP64
- FLEX STRIP

24V
DC Power

4.4
WATTS
FOOT

80>
CRI

UL US
LISTED
use only with
Class 2 Type
power units

flexible

VIEW ANGLE
120°

25,000+
HOURS

3
Years
Limited Manufacturer
Warranty

DIMMABLE

TRIMMABLE


STATIC ELECTRICITY
CAN DAMAGE
PRODUCT

BENEFITS



- Dimmable Via optional dimming solutions
- View Angle 120°
- Double sided 3M Tape backing
- Ultra bright surface - mount LEDs
- Low power consumption and little heat
- No RF interference
- Long life of LEDs
- Flexible LED strip lights
- Solid-state lighting
- Continuous length
- Can be cut to size at marked intervals (Qualified personnel)
- Available in Warm White and Pure White

APPLICATIONS

- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms and exhibition displays
- Optional aluminum mounting channel with clear and diffused lens



DIAGRAM

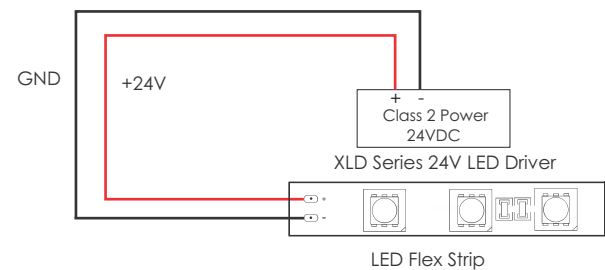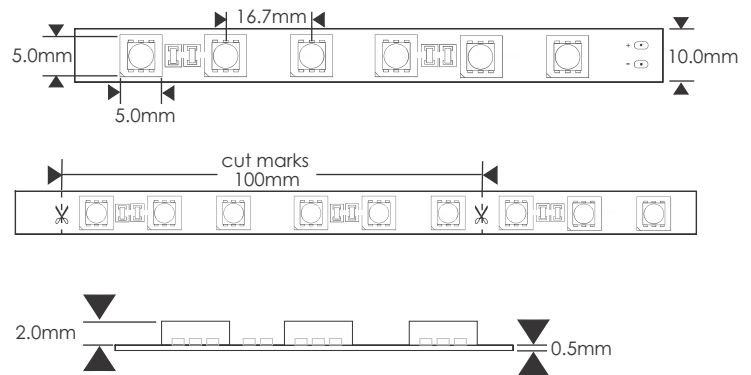

SPECIFICATIONS

Roll Size	5 Meters (16.4 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt Foot	4.4
Light Source	60 pcs/Meter (39.37") 5050 SMD LED
Dimensions	5000(L) x 10(W) x 2.5(H)mm (16.4' x 3/8" x 3/32")
Max Length	5 Meters (16.4 Feet)
View Angle	120°
Brightness	396~418 LM/ft (30.5cm)
Bend Radius	4 inches (100mm) Max, one flat plane
Lamp Life	>25,000 hours (average life)
IP Rating	IP22 Type A
Mount	Smooth Surface/burrows free
Operating Temperature	-25°C ~ +40°C

OPTIONAL ACCESSORIES

XLD200B-224V-FC (24VDC) One Channel Output-Class 2	E96L24DC-KO (24VDC) DimmableClass 2	Wago Block Connectors (#221-413)

