

MULTI-BEND LED STRIP LIGHT



Model: FA60S28-3M-12V-X (X = COLOR W:Neutral White, WW: Warm White)



MODEL

FA60S28-3M-12V-X

- COLOR (W=Neutral White, WW=Warm White)
- VOLTAGE (12V)
- LENGTH (3 Meters/9.84 Foot)
- LED TYPE(2835 SMD)
- LED/METER (60LED/Meter)
- COVER TYPE (Type A, no coating)
A=IP20 B=IP62 C=IP64
- FLEX STRIP



BENEFITS

- Angle bendable for custom shape lighting applications
- View Angle 120°
- Double sided 3M Tape backing
- Ultra bright surface - mount LEDs
- Low power consumption and little heat
- No RF interference
- Small Strip width allows to fit within tiny lighting areas
- Long life of LEDs
- Solid-state lighting
- Can be cut to size at marked intervals (Qualified personnel)
- Available in Neutral White & Warm White




APPLICATIONS

- Backlit Channel Letters
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms and exhibition Sign displays
- Optional aluminum mounting channel with clear and diffused lens

SPECIFICATIONS

Roll Size	3 Meters (9.84 Feet)
Max Voltage	12 VDC (regulated/Class 2)
Watt Foot	1.8 (1.5 Amps/Roll)
Light Source	60 pcs/Meter (39.37") 2835 SMD LED
Dimensions	3000(L) x 8.0(W) x 1(H)mm (9.84' x 0.31" x 0.03")
Max Length	3 Meters (9.84 Feet)
View Angle	120°
Brightness	200~220 LM/ft (30.5cm)
Color Temp.	WW: 3100K, W: 4100K
Lamp Life	>25,000 hours (average life)
IP Rating	IP20 Type A
Mount	Smooth Clean Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ +104°F)

DIAGRAM

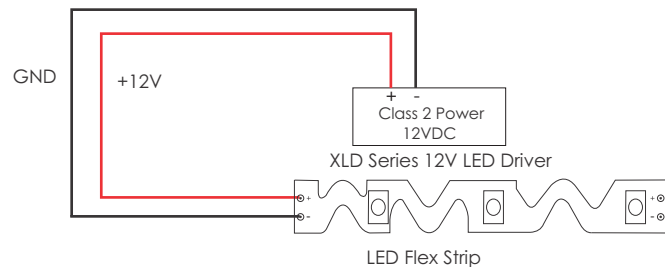

OPTIONAL POWER SUPPLIES

XLD75B-112V-FC (12VDC) One Channel Output-Class 2	E60L12DC-KO (12VDC) Dimmable Class 2	MTR72DAUL-1250B 60W Regulated Driver	MD-012-060VT (12VDC) Dimmable Class 2

