300W 12V Class 2 Constant Voltage Driver

Model : MD-012-300VWJ2V2

HUEDA LED
www.huedaled.com

12V DC | 300W | cULus LISTED | FC | SELV | 6 Years Limited Manufacturer Warranty | 5 MULTI TAP

FEATURES

- Constant Voltage Output
- Universal AC input: 100~277VAC
- Power Factor > 0.99
- High efficiency > 89%
- Protection : Short circuit / Over Voltage / Over temperature
- Suitable for use in dry, damp & wet indoor/outdoor applications
- Easy installation
- Free Air convection cooling
- Full protection aluminum housing
- cULus listed
- Suitable for LED lighting and sign lighting applications
- 8 knockouts

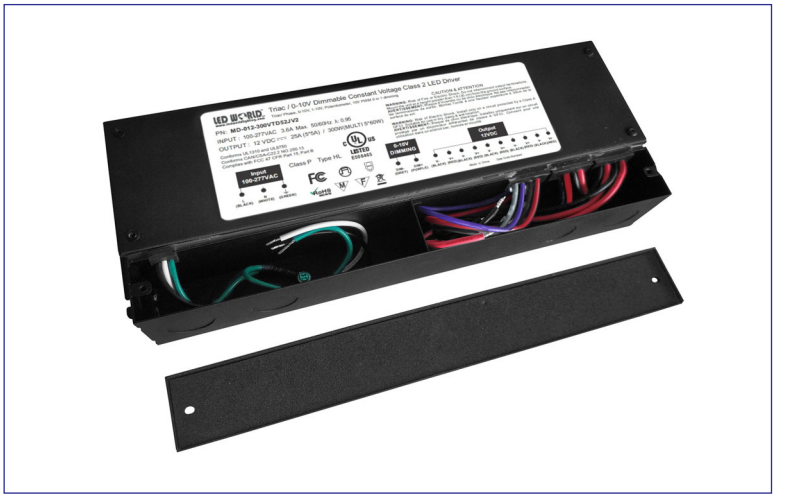

SPECIFICATIONS

Output	DC Voltage	12V
	Voltage	±0.5V Tolerance, ±0.5% Regulation
	Rated Current	5 x 5A
	Rated Power	300W (60W x 5)
Input	Voltage Range	100~277VAC
	Frequency Range	47~63Hz
	Power Factor (Typ.)	PF ≥ 0.95/120VAC, PF ≥ 0.95/277VAC
	Efficiency (Typ.)	85% @ 120VAC, 90% @ 277VAC
	THD (Typ.) @ full load	<20%
	AC Current (Typ.)	3.6A @ 100VAC
	Inrush Current (Typ.)	35A (twidth=960us) @ 120VAC; 43A (twidth=1ms) @ 277VAC
	Leakage Current	< 0.50mA
Protection	Short Circuit	Shutdown o/p voltage, re-power to recover after short circuit
	Over Current	≤ 1.4 x I out
	Over Temperature	100°C±10°C shutdown o/p voltage, automatically recovers after cooling
	Over Loading	≤ 120% Constant current limiting, auto recovery
Environment	Working Temp.	-40°C ~ 60°C (-40°F ~ 140°F)
	Working Humidity	20~90 % RH, non-condensing
	Storage Temp. Humidity	-40°C ~ 80°C, 10~95 % RH
	Temp. Coefficient	±0.03% / °C (0°~50°C)
	Vibration	10~500Hz, 2G 10min/1 cycle, period for 60min each along X, Y, Z axes
Safety & EMC	Safety standards	UL8750 CAN/CSA-C22.2 NO.250.13
	Withstand voltage	I/P-O/P:1.88KVAC
	Isolation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH
	EMC EMISSION	FCC Part 15 B
	EMC IMMUNITY	Compilance to EN61000-4-2, 3,4,5,11 (Surge 4KV)
Other	Net. Weight	2.3Kg (5.07lbs)
	Size	301L x 110W x 46H mm (11.85" x 4.33" x 1.82")

HUEDA LED | #130 10615 48 ST SE | CALGARY, AB T2C 2B7 | CANADA | Version 1.0 05/06/26

Copyright © 2026 HUEDA LED. A division of LED WORLD INC. All Rights Reserved. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).

300W 12V Class 2 Constant Voltage Driver

Model : MD-012-300VWJ2V2

HUEDA LED
www.huedaled.com

PRODUCT DIMENSION

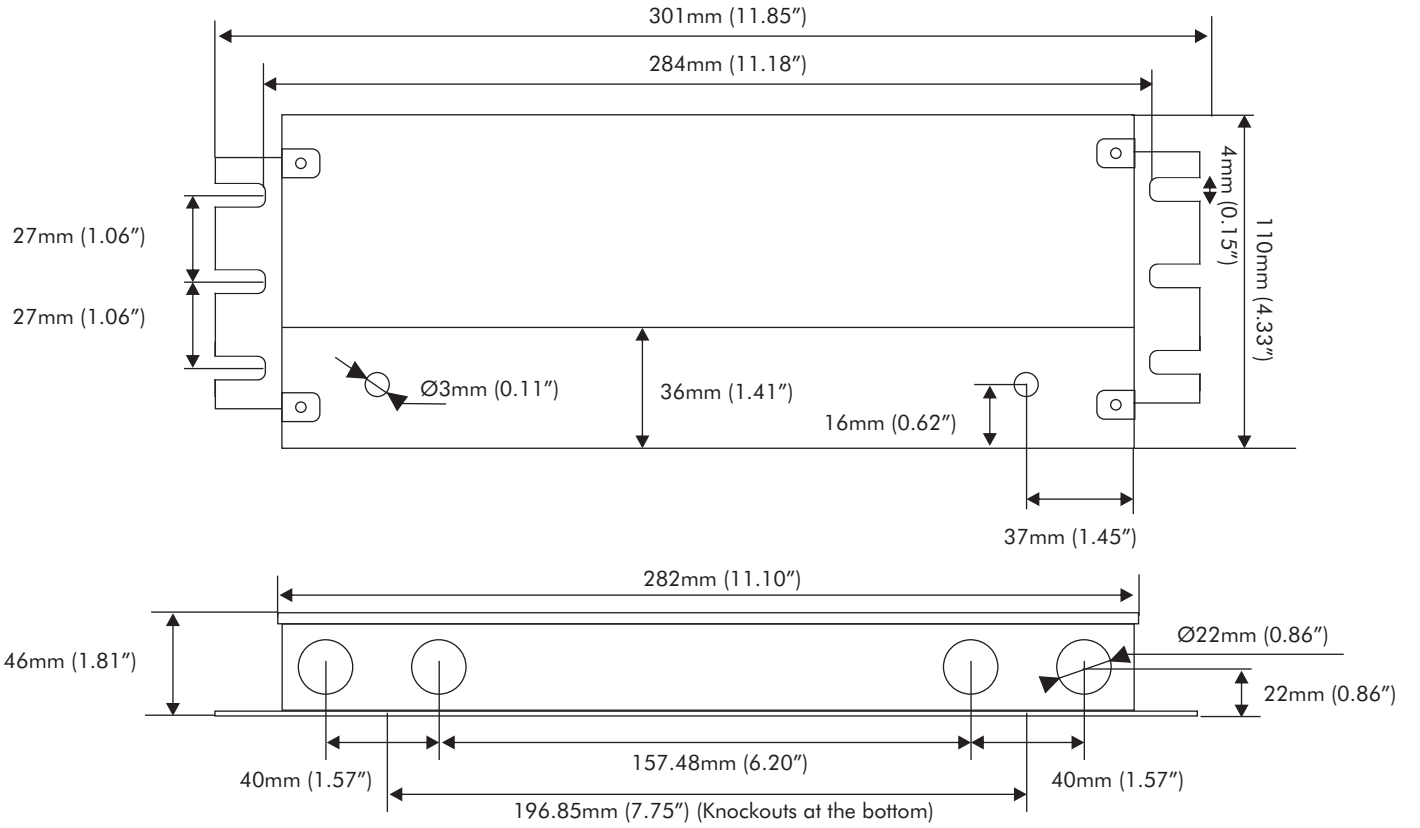

DERATING CURVE

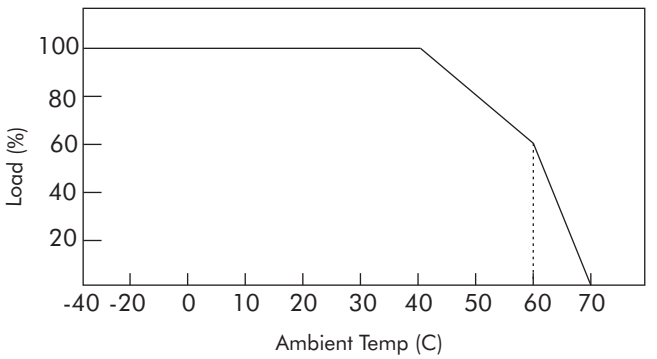

KNOCKOUTS

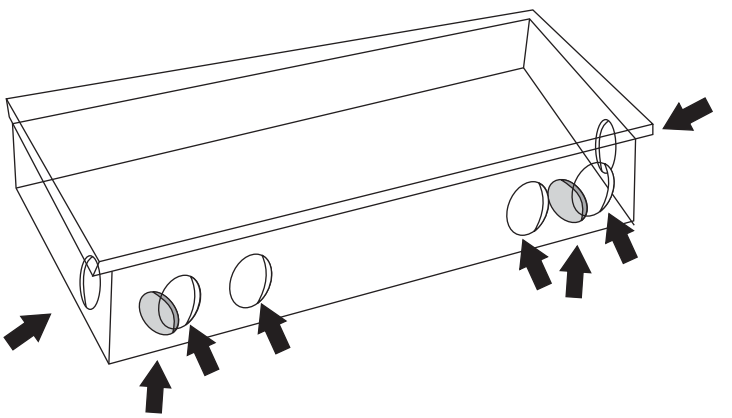

WARNING

- Check polarity
- Risk of Electric Shock.
- Risk of Fire. Installation involves special wiring methods to run wiring through a building structure. Consult a qualified electrician.
- Risk of Electric Shock. Mount the unit at a height more than 1 ft (30cm) from the ground

HUEDA LED | #130 10615 48 ST SE | CALGARY, AB T2C 2B7 | CANADA | Version 1.0 05/06/26

Copyright © 2026 HUEDA LED. A division of LED WORLD INC. All Rights Reserved. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).