LED FLEX STRIP - EvenBright

Model: FA-2835L-128-10M-24-X (X = COLOR NW:Neutral White / WW:Warm White)


HUEDA LED
www.huedaled.com



MODEL

FA-2835L-128-10M-24-X

- **COLOR** (NW, WW)
- **VOLTAGE** (24V)
- **LENGTH** (10 Meters/32.8 Foot)
- **LED/METER** (128LED/Meter)
- **LED TYPE** (2835 SMD)
- **COVER TYPE** (Type A, no coating)
  A=IP20 **B**=IP62 **C**=IP64
- **FLEX STRIP**

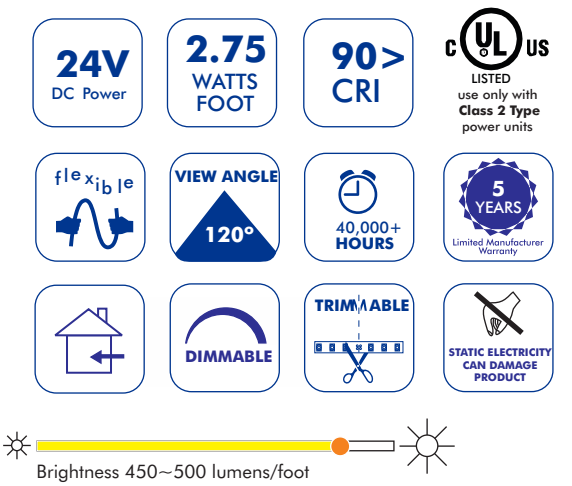


BENEFITS


- Ultra Evenbright surface mount LEDs
- Dimmable Via optional dimming solutions
- View Angle 120°
- Double sided 3M Tape backing
- Low power consumption and little heat
- No RF interference
- Long life of LEDs, new 2835 SMD LED
- Flexible LED strip lights
- Solid-state lighting
- Continuous length
- Can be cut to size at marked intervals (Qualified personnel)
- Available in Warm White(3000K) and Neutral White(4100K)


APPLICATIONS

- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms and exhibition displays
- Optional aluminum mounting channel with clear and diffused lens

DIAGRAM

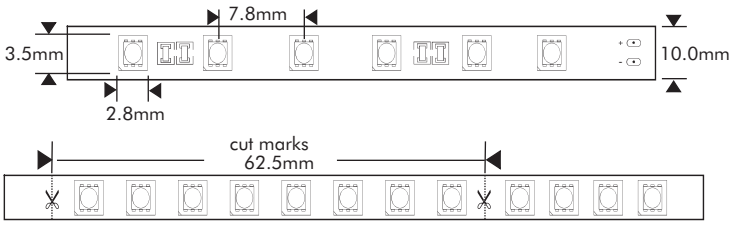



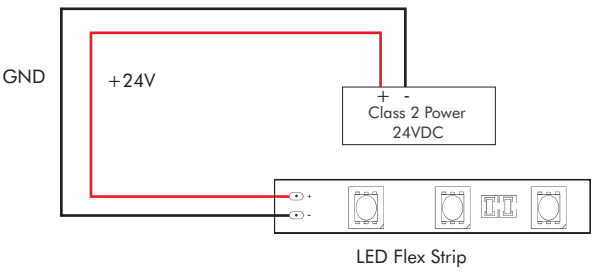


SPECIFICATIONS

Roll Size	10 Meters (32.8 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt / Foot	2.75 (3.75 Amps/Roll)
Light Source	128 pcs/Meter (39.37") 2835 SMD LED
Dimensions	10000(L) x 10(W) x 1(H)mm (32.8' x 25/64" x 0.03")
Max Length	10 Meters (32.8 Feet)
View Angle	120°
Brightness	450~500 LM/ft (30.5cm)
Bend Radius	4 inches (100mm) Max, one flat plane
Lamp Life	>40,000 hours (average life)
IP Rating	IP20 Type A
Mount	Smooth Clean Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ +104°F)

OPTIONAL CLASS 2 POWER SUPPLIES/ACCESSORIES

MD-024-060VTDHV2 (60W) Dimmable Class 2	MD-024-096VTDHV2 (96W) Dimmable Class 2	MD-024-192VTD52JV2 (192W) Dimmable Class 2	Wago Block Connectors (#221-413)
			

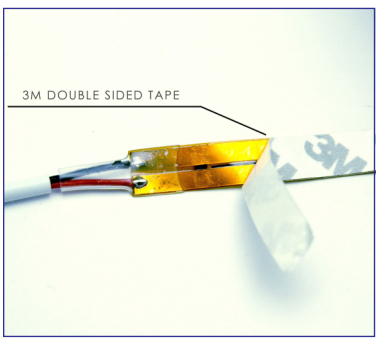

Copyright © 2026 HUEDA™ LED, A division of LED World Inc.. All Rights Reserved. We are not responsible for errors or omissions. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).