
SIDE EMITTING LED FLEX STRIP

Model: FA120M30-5M-12V-X (WW: Warm White (3000K), W:Pure White (5000K))


HUEDA LED
www.huedaled.com

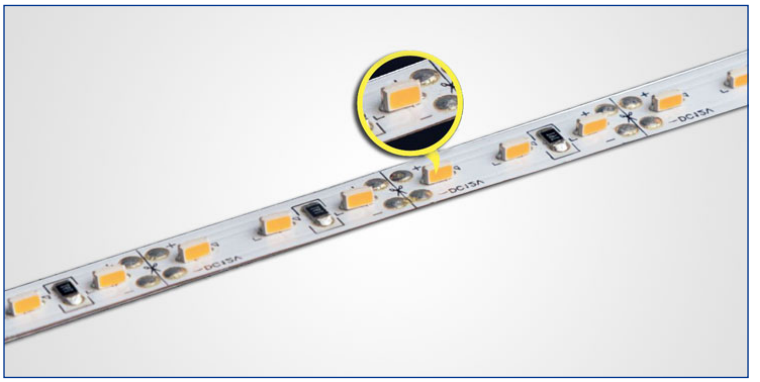

MODEL

FA120M30-5M-12V-X

- **COLOR** (WW=Warm White, W=Pure White)
- **VOLTAGE** (12V)
- **LENGTH** (5 Meters)
- **LED TYPE** (3014 SMD)
- **LED/METER** (120LED/Meter)
- **COVER TYPE** (Type A, no coating)
  A=IP22 **B**=IP62 **C**=IP64
- **FLEX STRIP**

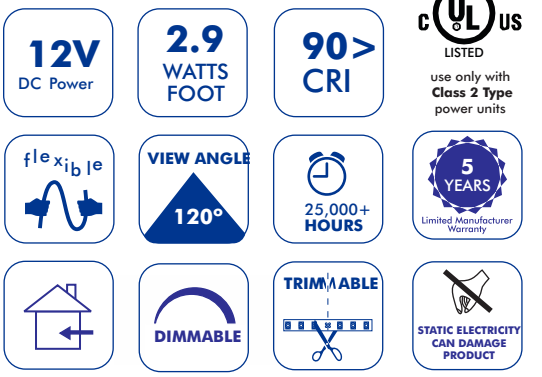






BENEFITS


- 3014 side-emitting LEDs
- Epistar chips, LM-80 tested
- Dimmable Via optional dimming solutions
- View Angle 120°
- Double sided 3M Tape backing
- Ultra bright surface - mount LEDs
- Verticle LEDs
- No RF interference
- Long life of LEDs
- Flexible LED strip lights
- Continuous length
- Can be cut to size at marked intervals (Qualified personnel)
- Available in Warm White (3000K) and Pure White (5000K)

DIAGRAM







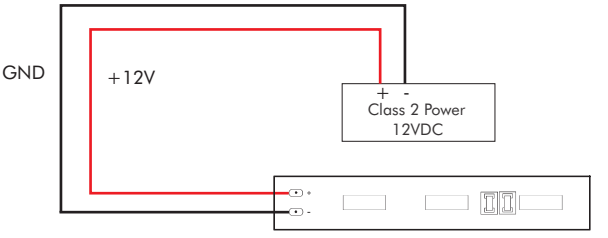

Side Emitting LED Flex Strip

APPLICATIONS


- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms and exhibition displays
- Channel letters

SPECIFICATIONS

Roll Size	5 Meters (16.4 Feet)
Max Voltage	12 VDC (regulated/Class 2)
Watt Foot	2.9 (4 Amps/Roll)
Light Source	120 pcs/Meter (39.37") 3014 SMD LED
Dimensions	5000(L) x 8(W) x 2(H)mm (16.4' x 0.31" x 0.07")
Max Length	5 Meters (16.4 Feet)
View Angle	120°
Brightness	210~220 LM/ft (30.5cm)
Bend Radius	4 inches (100mm) Max, one flat plane
Lamp Life	>25,000 hours (average life)
IP Rating	IP22 Type A
Mount	Smooth Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ 104°F)

OPTIONAL ACCESSORIES

MD-012-060VTDHV2 (60W) Dimmable Class 2	MD-012-180VTD52JV2 (180W) Multi tab Dimmable Class 2 Driver	MD-012-300VTD52JV2 (300W) Multi tab Dimmable Class 2 Driver	Wago Block Connectors (#221-413)
			

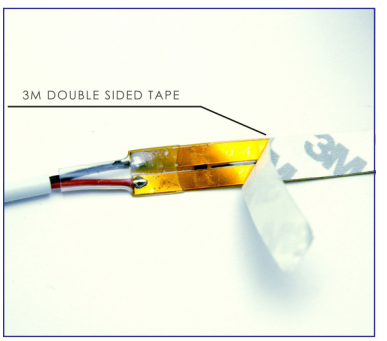

Copyright © 2023 HUEDA™ LED, A division of LED World Inc.. All Rights Reserved. We are not responsible for errors or omissions. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).