
EvenBright™ CINCO BRIGHT LED FLEX STRIP

Model: FA128M57-4M-24V-X (X = COLOR W : Warm White / P : Pure White / N : Neutral White)

HUEDA LED
www.huedaled.com

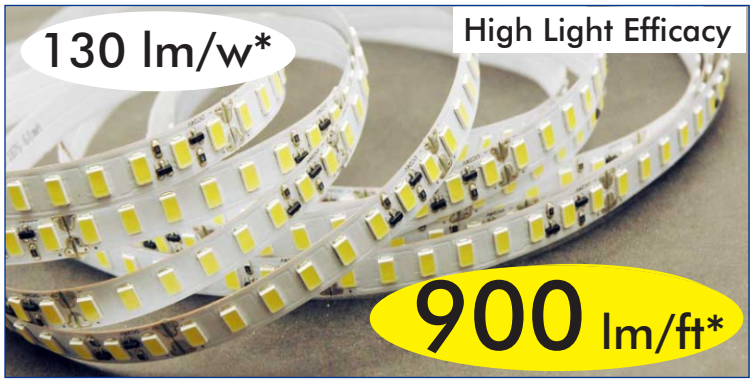

24V DC Power | 7 WATTS FOOT | IC DRIVEN | cULus LISTED use only with Class 2 Type power units

flexible | VIEW ANGLE 120° | CINCO BRIGHT ★★★★★ | 5 YEARS Limited Manufacturer Warranty

90> CRI | TRIMMABLE | STATIC ELECTRICITY CAN DAMAGE PRODUCT




CINCO BRIGHT **900 lm/ft**

FEATURES

- High light efficacy CINCO Bright 900 lm/ft strip light
- 130 LM/W even bright no spot lighting when used with optional aluminum channel.
- With Constant Current IC for each sections, there is no need of constant current driver
- Dimmable
- View Angle 120°
- Ceramic Tape backing
- Ultra bright surface - mount LEDs
- CRI 90 or better
- Long life of LED
- Can be cut to size at marked intervals (at each 8 LEDs)
- Available in Deep Warm White(2700K), Warm White (3000K), Neutral White (4000K) and Pure White (5000K)



Even Lighting
No Spotting




Constant Current
IC

APPLICATIONS

- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms, jewelry showrooms and exhibition displays
- Must be used with optional aluminum mounting channel with diffusion lens


SPECIFICATIONS

Roll Size	4 Meters (13.12 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt Foot	7 (3.8 Amps/Roll)
Light Source	128 pcs/Meter (39.37") 5730 SMD LED
Dimensions	4000(L) x 10(W) x 1.2(H)mm (13.12' x 0.4" x 0.04")
Max Length	4 Meters (13.12 Feet)
View Angle	120°
Brightness	900 LM/ft (30.5cm)
Bend Radius	4 inches (100mm) Max, one flat plane
Lamp Life	>35,000 hours (average life)
IP Rating	IP22 Type A
Mount	Smooth Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ 104°F)

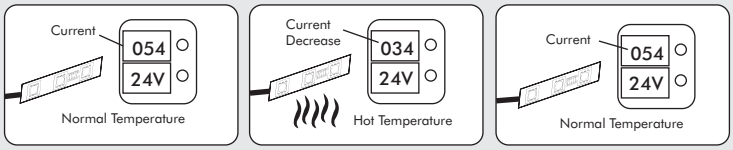

With IC design, when the temperature of the strips gets higher, the current will decrease to protect the LEDs for a long life span.

DIAGRAM

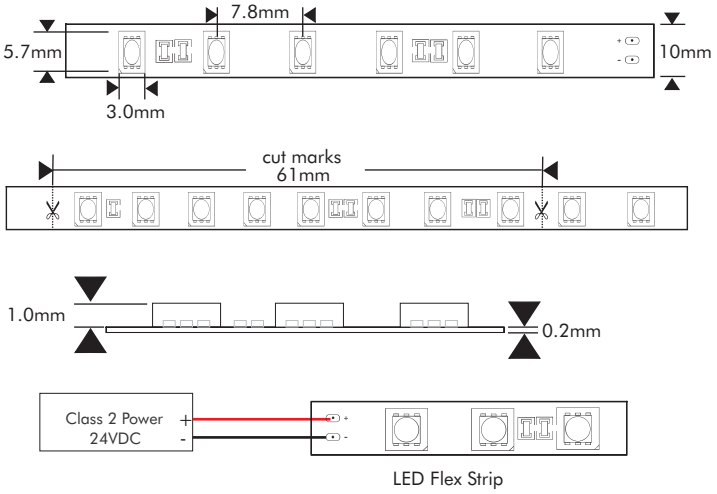

LED Flex Strip

OPTIONAL DRIVERS/ACCESSORIES

MD-024-060VTDHV2	MD-024-096VTDHV2	MD-024-192VTD52JV2
(60W) Dimmable Class 2	(96W) Dimmable Class 2	(192W) Dimmable Class 2





*Lumen output are measured according to PMS-80, with a tolerance of +/- 5%

Copyright © 2022 HUEDA™ LED, A division of LED World Inc.. All Rights Reserved. We are not responsible for errors or omissions. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).