LED FLEX STRIP - EvenBright™

Model: FA490M21-5M-24V-X (X = COLOR W:Pure White / WW(2700K) / WW:Warm White / NW:Neutral White)

HUEDA LED
www.huedaled.com



BENEFITS

- Even lighting, High density LEDs
- Dimmable
- View Angle 120°
- Double sided 3M Tape backing
- Ultra bright surface - mount LEDs
- CRI 90 or better
- Long life of LEDs, LM-80 tested LEDs
- Flexible LED strip lights
- Can be cut to size at marked intervals (about an inch)
- Available in Deep Warm White (2700K), Warm White (3000K), Pure White (5600K) and Neutral White (4200K)

APPLICATIONS

- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms, jewelry showrooms and exhibition displays
- Optional aluminum mounting channel with clear and diffused lens

SPECIFICATIONS


Roll Size	5 Meters (16.4 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt Foot	5.0 (3.5 Amps/Roll)
Light Source	490 pcs/Meter (39.37") 2110 SMD LED
Dimensions	5000(L) x 10(W) x 1.0(H)mm (16.4' x 3/8" x 3/100")
Max Length	5 Meters (16.4 Feet)
View Angle	120°
Brightness	490~510 LM/ft (30.5cm)
Bend Radius	4 inches (100mm) Max, one flat plane
Lamp Life	>30,000 hours (average life)
IP Rating	IP22 Type A
Mount	Smooth Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ 104°F)

MODEL

FA490M21-5M-24V-X


- **COLOR** (WW(2700K), WW, W, NW)
- **VOLTAGE** (24V)
- **LENGTH** (5 Meters)
- **LED TYPE** (2110 SMD)
- **LED/METER** (490LED/Meter)
- **COVER TYPE** (Type A, no coating)
  A=IP22 **B**=IP62 **C**=IP64
- **FLEX STRIP**




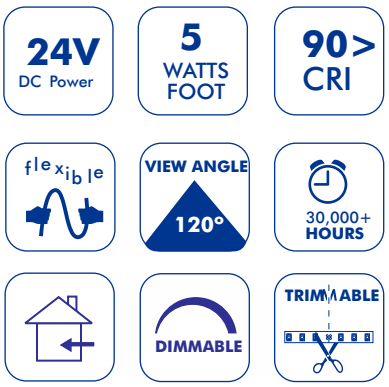



Brightness 490~510 lumens/foot

DIAGRAM

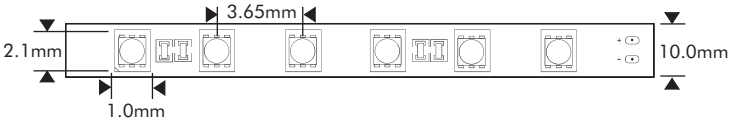







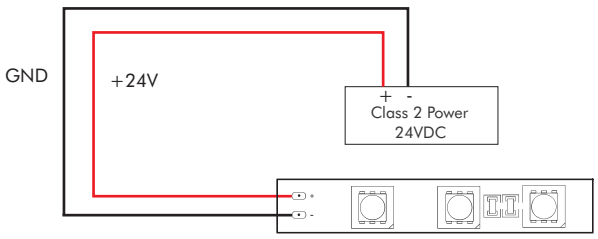

LED Flex Strip

OPTIONAL ACCESSORIES

MD-024-060VTDHV2 (60W) Dimmable Class 2	MD-024-096VTDHV2 (96W) Dimmable Class 2	MD-024-192VTD52JV2 (192W) Dimmable Class 2	Wago Block Connectors (#221-413)
			

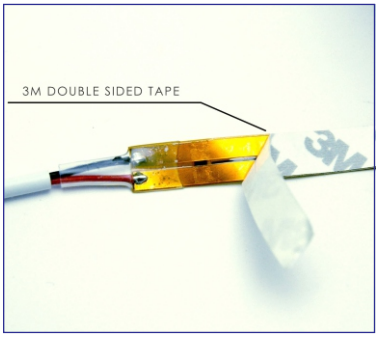

Copyright © 2022 HUEDA™ LED, A division of LED World Inc.. All Rights Reserved. We are not responsible for errors or omissions. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).