LED FLEX STRIP - Long Run Series

Model: FA60M28-15.2M-24V-X (X = COLOR W:Neutral White / WW:Warm White)

HUEDA LED
www.huedaled.com



BENEFITS

- Continuous 50ft Long run
- Dimmable via optional dimming solutions
- View Angle 120°
- Double sided 3M Tape backing
- Ultra bright surface - mount LEDs
- Low power consumption and little heat
- Long life of LEDs, new 2835 SMD LED
- Flexible LED strip lights
- Solid-state lighting
- Constant brightness
- Can be cut to size at marked intervals (Qualified personnel)
- Available in Warm White(3000K) and Neutral White(4100K)


APPLICATIONS


- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms and exhibition displays
- Optional aluminum mounting channel with clear and diffused lens

MODEL


FA60M28-15.2M-24V-X


- **COLOR** (W=Neutral White, WW=Warm White)
- **VOLTAGE** (24V)
- **LENGTH** (15.2 Meters/50 Foot)
- **LED TYPE** (2835 SMD)
- **LED/METER** (60LED/Meter)
- **COVER TYPE** (Type A, no coating)
  A=IP20 **B**=IP62 **C**=IP64
- **FLEX STRIP**

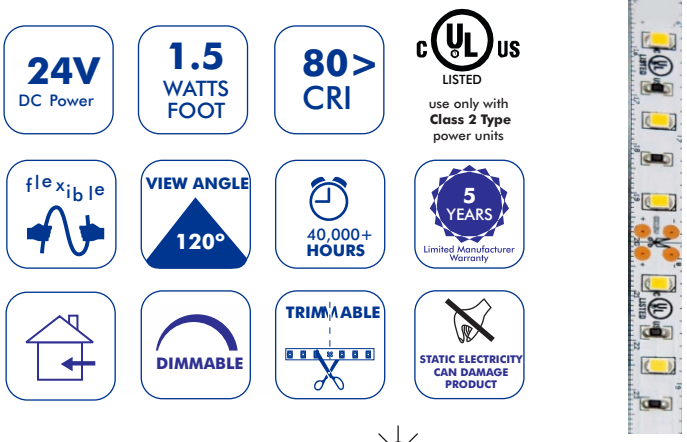




DIAGRAM

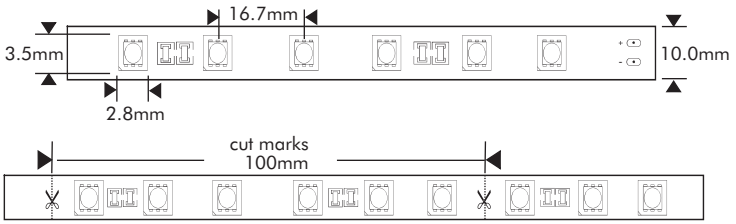




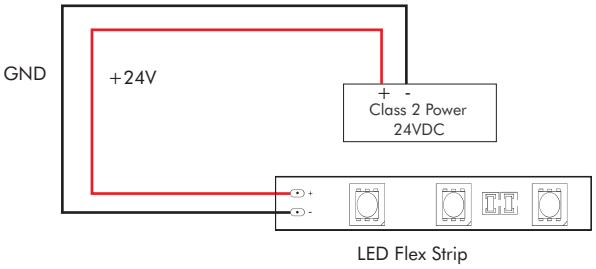


SPECIFICATIONS

Roll Size	15.2 Meters (50 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt / Foot	1.5 (3.19 Amps/Roll)
Light Source	60 pcs/Meter (39.37") 2835 SMD LED
Dimensions	15240(L) x 10(W) x 1(H)mm (50' x 25/64" x 0.03")
Max Length	15.2 Meters (50 Feet)
View Angle	120°
Brightness	130~140 LM/ft (30.5cm)
Bend Radius	4 inches (100mm) Max, one flat plane
Lamp Life	>40,000 hours (average life)
IP Rating	IP20 Type A
Mount	Smooth Clean Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ +104°F)

OPTIONAL POWER SUPPLIES/ACCESSORIES

MD-024-060VTDHV2 (60W) Dimmable Class 2	MD-024-096VTDHV2 (96W) Dimmable Class 2	MD-024-192VTD52JV2 (192W) Dimmable Class 2	Wago Block Connectors (#221-413)
			

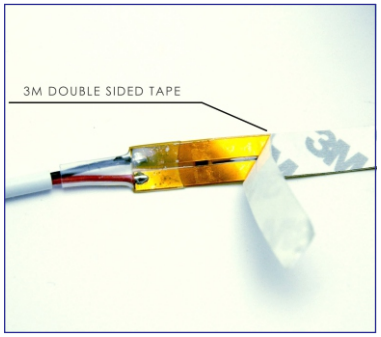

Copyright © 2022 HUEDA™ LED, A division of LED World Inc.. All Rights Reserved. We are not responsible for errors or omissions. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).