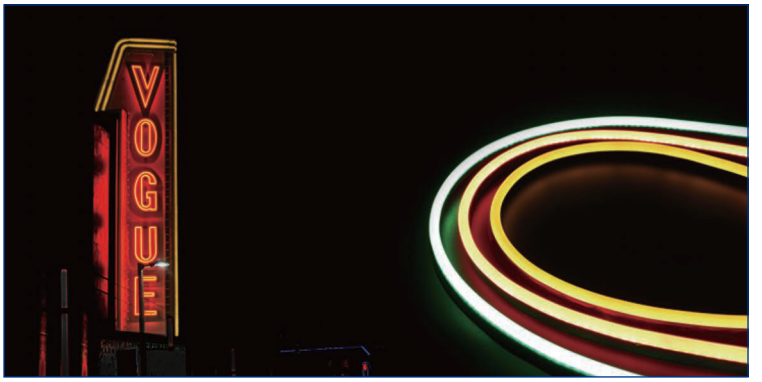
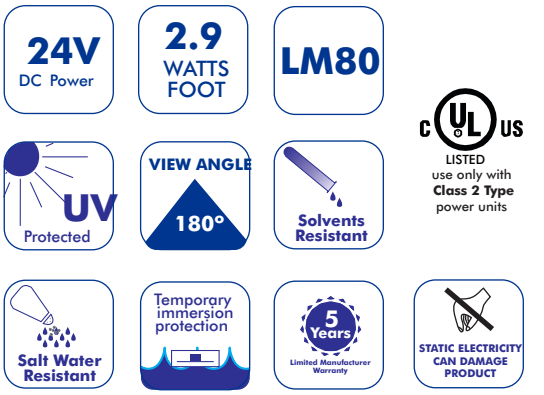
# NEO-FLEX LED STRIP LIGHT

**Model**: FC120M30-XM-24V-X [Color: White (3000K, 4100K), Yellow, Red, Green, Blue]

HUEDA LED
www.huedaled.com




## FEATURES

- Even Neon lighting
- Fabricated with Eco-friendly, UV-resistant silicone material
- V-2 flame retardant
- Low voltage (24VDC) LED Neon
- Cut marks at each 1.97 inch
- Lateral bend flexible Neon LED light
- 50mm (1.97") max. bending
- Warm White (3000K), Neutral White (4100K) available in 9m (29.52ft) roll
- Yellow, Red, Green and Blue available in 10m (32.8ft) roll

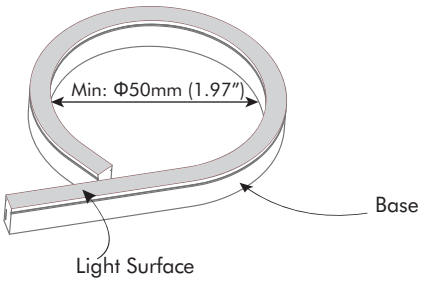
## APPLICATIONS

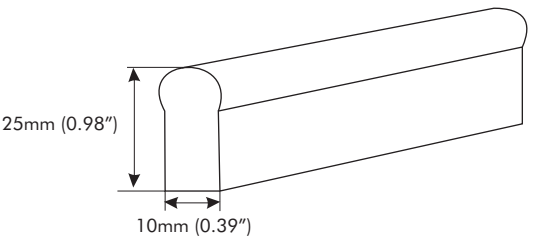
- Sign lighting
- Corporate showrooms signs, exhibition sign displays
- Indoor/Outdoor decoration lighting

## AVAILABLE COLORS

- Warm White(3000K) - 180~220lm
- Neutral White (4100K) - 180~220lm
- Yellow - 135~148lux
- Red - 125~142lux
- Green - 90~115lux
- Blue - 40~50lux

## BEND RADIUS





## SPECIFICATIONS

| | |
|---|---|
| **Roll Size** | 10M (32.80 Feet) / 9M (29.52ft) |
| **Input Voltage** | 24 VDC (regulated/Class 2), (4 Amps/Roll) |
| **Watt Foot** | 2.9W |
| **LED Qty** | 120 pcs/Meter (39.37") |
| **Dimensions** | 10(W) x 25(H)mm (0.39" x 0.98") |
| **Max Length** | 10m (32.80 ft) / 9m (29.52ft) |
| **View Angle** | 180° |
| **Cut Mark** | 50mm (1.97") |
| **Bend Radius** | 1.97 inches (50mm) Max, one flat plane |
| **IP Rating** | IP68 |
| **Installation** | Bracket, Aluminum Channel |
| **Operating Temperature** | -25°C ~ +45°C (-13°F ~ 113°F) |


## ACCESSORIES


Aluminum channel (N24-ACL)



Power supply connector right end (N24-PCR)


Power supply connector (N24-PCI)


Interconnection connector (N24-ICSF)


Interconnection L connector (N24-LCS)


Mounting Clips (N24-ACS)


Silicone end cap (N24-ECS)

## POWER SUPPLIES


MD-024-096VTDHV2
24VDC Class 2 Power Supply)


MD-024-192VTHD52JV2
24VDC Class 2 Power Supply)



Copyright © 2026 HUEDA LED. A division of LED WORLD INC. All Rights Reserved. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).