NEO-FLEX LED STRIP LIGHT

Model: NF0512-24V-X (X:Color: 3000K, 4100K, Red, Green, Blue)

HUEDA LED
www.huedaled.com



24V DC Power | 2.9 WATTS FOOT | LM80

UV Protected | VIEW ANGLE 145° | Solvents Resistant

c UL us LISTED use only with **Class 2 Type** power units

Salt Water Resistant | Temporary immersion protection | 5 Years Limited Manufacturer Warranty | STATIC ELECTRICITY CAN DAMAGE PRODUCT

FEATURES

- Even Neon lighting
- Fabricated with Eco-friendly, UV-resistant silicone material
- Flame resistant material
- Low voltage (24VDC) LED Neon
- Cut marks at each 50mm (1.97 inch)
- Lateral bend flexible Neon LED light
- 30mm (1.18") max. bending
- Available in Warm White (3000K), Neutral White (4100K), Red, Green, Blue


AVAILABLE COLORS

- Warm White(3000K) - 189lm
- Neutral White (4100K) - 180~220lm
- Red
- Green
- Blue

APPLICATIONS

- Sign lighting
- Corporate showrooms signs, exhibition sign displays
- Indoor/Outdoor decoration lighting

BEND RADIUS

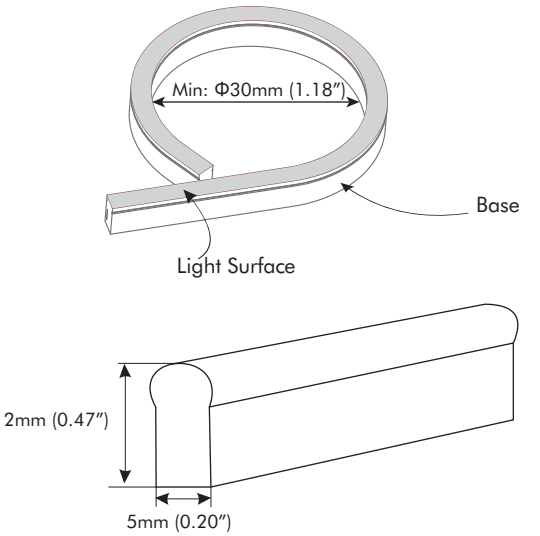


SPECIFICATIONS

Roll Size	4 Meters (13.12 Feet)
Input Voltage	24 VDC (regulated/Class 2), (1.58 Amps/Roll)
Watt Foot	2.9 W/FT
LED Qty	120 pcs/Meter (39.37")
Dimensions	4,000(L) x 5(W) x 12(H)mm (13.12' x 0.20" x 0.47")
Max Length	4 Meters (13.12 Feet)
View Angle	145°
Cut Mark	50mm (1.97")
Bend Radius	1.18 inches (30mm) Max, one flat plane
IP Rating	IP67
Installation	Bracket, Aluminum Channel
Operating Temperature	-25°C ~ +45°C (-13°F ~ 113°F)

ACCESSORIES



Aluminum channel (NF0512-CHL)



Silicone end cap

POWER SUPPLIES



MD-024-096VTDHV2
24VDC Class 2 Power Supply)



MD-024-192VTHD52JV2
24VDC Class 2 Power Supply)

Copyright © 2026 HUEDA LED. A division of LED WORLD INC. All Rights Reserved. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).