MULTI-BEND LED STRIP LIGHT

Model: FA60S28-5M-24V-X (X = COLOR W:Neutral White, WW: Warm White)

HUEDA LED
www.huedaled.com



MODEL

FA60S28-5M-24V-X

- **COLOR** (W=Neutral White, WW=Warm White)
- **VOLTAGE** (24V)
- **LENGTH** (5 Meters/16.4 Foot)
- **LED TYPE** (2835 SMD)
- **LED/METER** (60LED/Meter)
- **COVER TYPE** (Type A, no coating)
  A=IP20 **B**=IP62 **C**=IP64
- **FLEX STRIP**



24V DC Power

2.2 WATTS FOOT

80> CRI

c UL us LISTED use only with **Class 2 Type** power units

flexible

VIEW ANGLE 120°

25,000+ HOURS

3 YEARS Limited Manufacturer Warranty

DIMMABLE

TRIMMABLE

STATIC ELECTRICITY CAN DAMAGE PRODUCT

Brightness 170~180 lumens/foot

BENEFITS

- Angle bendable for custom shape lighting applications
- View Angle 120°
- Double sided 3M Tape backing
- Ultra bright surface - mount LEDs
- Low power consumption and little heat
- No RF interference
- Small Strip width allows to fit within tiny lighting areas
- Long life of LEDs
- Solid-state lighting
- Can be cut to size at marked intervals (Qualified personnel)
- Available in Neutral White & Warm White

APPLICATIONS

- Backlit Channel Letters
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms and exhibition Sign displays
- Optional aluminum mounting channel with clear and diffused lens

DIAGRAM

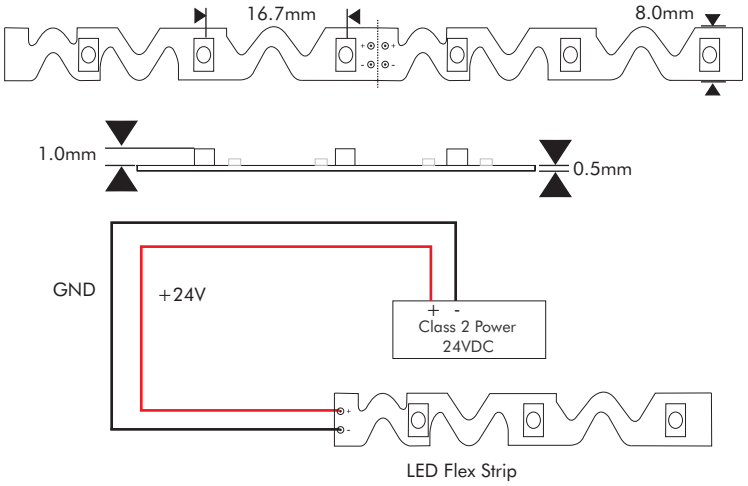

LED Flex Strip



SPECIFICATIONS

Roll Size	5 Meters (16.4 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt Foot	2.2 (1.5 Amps/Roll)
Light Source	60 pcs/Meter (39.37") 2835 SMD LED
Dimensions	5000(L) x 8.0(W) x 1(H)mm (16.4' x 0.31" x 0.03")
Max Length	5 Meters (16.4 Feet)
View Angle	120°
Brightness	170~180 LM/ft (30.5cm)
Color Temp.	WW: 3100K, W: 4100K
Lamp Life	>25,000 hours (average life)
IP Rating	IP20 Type A
Mount	Smooth Clean Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ +104°F)

OPTIONAL POWER SUPPLIES/ACCESSORIES

MD-024-060VTDHV2 (60W) Dimmable Class 2	MD-024-096VTDHV2 (96W) Dimmable Class 2	MD-024-192VTD52JV2 (192W) Dimmable Class 2	Wago Block Connectors (#221-413)
			



Copyright © 2022 HUEDA™ LED, A division of LED World Inc.. All Rights Reserved. We are not responsible for errors or omissions. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).