LED FLEX STRIP - Coated Bright Plus

Model: FC60M28-15.2M-24V-X (X = COLOR W:Neutral White / WW:Warm White)

HUEDA LED
www.huedaled.com



MODEL

FC60M28-15.2M-24V-X

- COLOR (W=Neutral White, WW=Warm White)
- VOLTAGE (24V)
- LENGTH (15.2 Meters/50 Foot)
- LED TYPE (2835 SMD)
- LED/METER (60LED/Meter)
- COVER TYPE (Type C, Silicone coating) A=IP20 B=IP58 C=IP68
- FLEX STRIP



24V DC Power

1.5 WATTS FOOT

80> CRI

flexible

VIEW ANGLE 120°

40,000+ HOURS

c UL us LISTED
use only with **Class 2 Type** power units

DIMMABLE

TRIMMABLE

3 YEARS Limited Manufacturer Warranty

Brightness 130~140 lumens/foot


BENEFITS


- Dimmable Via optional dimming solutions
- View Angle 120°
- Double sided 3M Tape backing
- Ultra bright surface - mount LEDs
- Low power consumption and little heat
- No RF interference
- Long life of LEDs, new 2835 SMD LED
- Flexible LED strip lights
- Silicone coated for use in damp locations
- Continuous length
- Can be cut to size at marked intervals (Qualified Electricians)
- Available in Warm White and Neutral White


APPLICATIONS

- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms and exhibition displays
- Optional aluminum mounting channel with clear and diffused lens

DIAGRAM

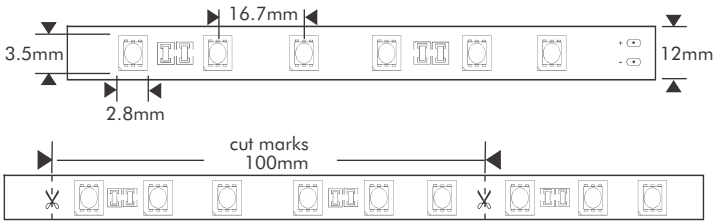



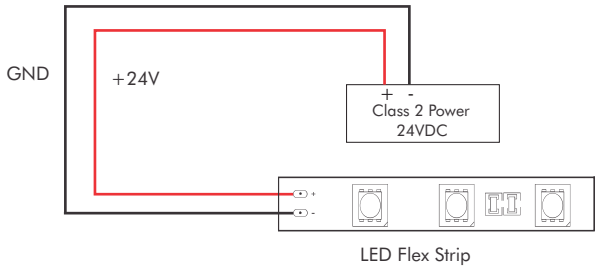

SPECIFICATIONS

Roll Size	15.2 Meters (50 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt Foot	1.5 (3 Amps/Roll)
Light Source	60 pcs/Meter (39.37") 2835 SMD LED
Dimensions	15200(L) x 12(W) x 4(H)mm (50' x 0.472" x 0.157")
Max Length	15.2 Meters (50 Feet)
View Angle	120°
Brightness	130~140 LM/ft (30.5cm)
Bend Radius	4 inches (100mm) Max, one
Lamp Life	>40,000 hours (average life)
IP Rating	IP68 TYPE C
Mount	Smooth Clean Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ +104°F)

OPTIONAL CLASS 2 POWER SUPPLIES

MD-024-060VTHDV2 (60W) Dimmable Class 2	MD-024-096VTHDV2 (96W) Dimmable Class 2	MD-024-192VTD52JV2 (192W) Multi tab Dimmable Class 2 Driver	MD-024-288VTD52JV2 (192W) Multi tab Dimmable Class 2 Driver
			

Copyright © 2022 HUEDA™ LED, A division of LED World Inc.. All Rights Reserved. We are not responsible for errors or omissions. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).