LED WALL WASHER STRIP LIGHT

Model: FP06(SP)-V2410790

HUEDA LED
www.huedaled.com



24V DC Power | 5.8 WATTS FOOT | 80> CRI | ETL C US LISTED Intertek

DIMMABLE | BEAM ANGLE 30° | 30,000+ HOURS | 5 YEARS Limited Manufacturer Warranty

WALL WASH | TRIMMABLE | flexible | STATIC ELECTRICITY CAN DAMAGE PRODUCT


FEATURES

- Sealed water resistant
- Bendable Strip light
- 30° Beam angle
- Low voltage (24VDC) LED
- NICHIA LEDs
- Up to 3m (9.84ft) wall wash spread
- Indoor/Outdoor rated

APPLICATIONS

- Wall wash lighting
- Sign displays
- Indoor/Outdoor lighting


CUT LENGTH

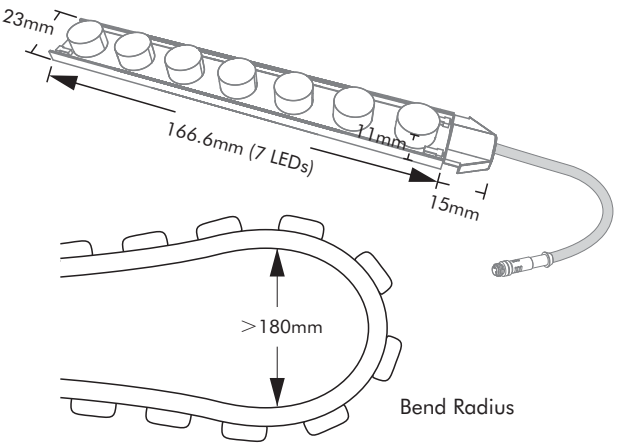

SPECIFICATIONS

Roll Size	2M (6.56 Feet) x 3pcs
Input Voltage	24 VDC (regulated/Class 2), (1.6 Amps/Roll)
Watt Foot	5.8 W
LED Qty	42 pcs/Meter (39.37") NICHIA
Dimensions	2,000(L) x 18.2(W) x 9.2(H)mm (6.56' x 0.71" x 0.36")
Max Length	2 Meters (6.56 Feet)
Beam Angle	30°
Luminous Flux	2260Lm
Luminous Efficacy	108 Lm/W
IP Rating	IP67
Cut Installation	Soldering
Operating Temperature	-25°C ~ +45°C (-13°F ~ 113°F)

LIGHT DISTRIBUTION

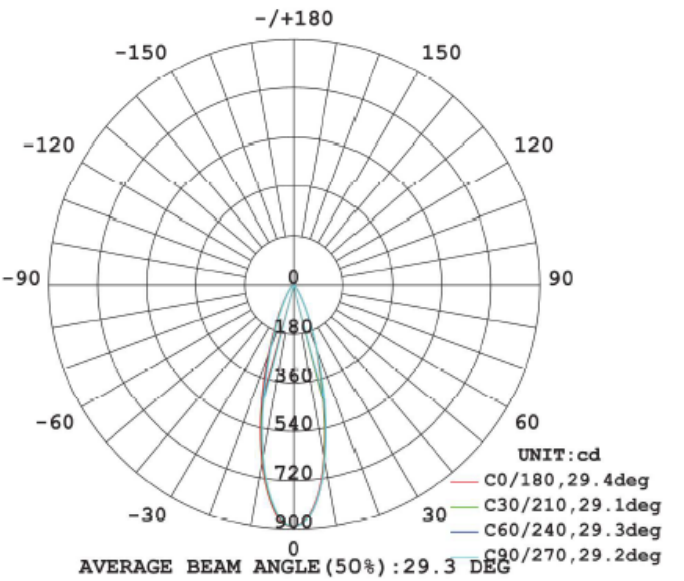

OPTIONAL DRIVERS/ACCESSORIES

MD-024-096VTDHV2 (60W) Dimmable Class 2	MD-024-192VTD52JV2 (192W) Multi tab Dimmable Class 2 Driver	MD-024-060VTDHV2 (60W) Dimmable Class 2
		

Copyright © 2026 HUEDA LED. A division of LED WORLD INC. All Rights Reserved. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).